




RV Series

High Performance Worm Gearboxes For Nema & IEC Motor

Inch series

	NEMA Flange	Input Bore Diameter	Available Ratios											
			5	7.5	10	15	20	25	30	40	50	60	80	100
030	48C	0.5	●	●	●	●	●	●	●	●	●	●	●	●
040	56C	0.625	●	●	●	●	●	●	●	●	●	●	●	●
050	56C	0.625	●	●	●	●	●	●	●	●	●	●	●	●
063	56C	0.625					●	●	●	●	●	●	●	
	140TC	0.875		●	●	●	●	●	●	●				●
075	56C	0.625									●	●	●	
	140TC	0.875				●	●	●	●	●				
	180TC	1.125		●	●	●								●
090	56C	0.625											●	
	140TC	0.875						●	●	●	●	●		
	180TC	1.125		●	●	●	●	●	●	●				●
110	140TC	0.875									●	●	●	
	180TC	1.125					●	●	●	●	●	●		
	210TC	1.375		●	●	●	●							●
130	140TC	0.875											●	
	180TC	1.125							●	●	●	●	●	
	210TC	1.375		●	●	●	●	●	●	●				

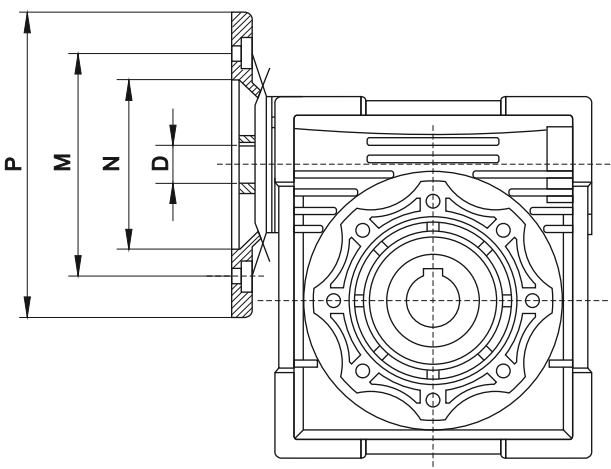

Predisposition

NMRV	PAM IEC	N	M	P	D											
					5	7.5	10	15	20	25	30	40	50	60	80	100
025	56B14	50	65	80	9	9	9	9	9		9	9	9	9	-	-
030	63B5	95	115	140	11	11	11	11	11	11	11	11	11	11	-	-
	63B14	60	75	90												
	56B5	80	100	120	9	9	9	9	9	9	9	9	9	9	9	-
	56B14	50	65	80												
040	71B6	110	130	160	14	14	14	14	14	14	14	14	-	-	-	-
	71B14	70	85	105												
	63B5	95	115	140	11	11	11	11	11	11	11	11	11	11	11	11
	63B14	60	75	90												
050	56B5	80	100	120	-	-	-	-	-		-	-	9	9	9	9
	80B5	130	185	200	19	19	19	19	19	19	19	-	-	-	-	-
	80B14	80	100	120												
	71B5	110	130	160	14	14	14	14	14	14	14	14	14	14	14	-
060	71B14	70	85	105												
	63B5	95	115	140	-	-	-	-	-		-	11	11	11	11	11
	90B5	130	165	200	-	24	24	24	24	24	24	-	-	-	-	-
	90B14	95	115	140												
075	80B5	130	165	200	-	19	19	19	19	19	19	19	19	19	-	-
	80B14	80	100	120												
	71B5	110	130	160	-	-	-	-	-	28	-	-	14	14	14	14
	71B14	70	85	105						-	-	14	14	14	14	14
090	100/112B5	180	215	250	-	28	28	28	-	-	-			-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	-	-	-	-
	90B14	95	115	140												
110	80B5	130	165	200	-	-	-	-	19	19	19	19	19	19	19	19
	80B14	80	100	120	-	-	-	-	-	28	-	-	14	14	14	14
	71B5	110	130	160	-	-	-	-	-	24	24	24	24	24	24	24
	71B14	70	85	105						-	-	-	-	-	-	-
130	100/112B5	180	215	250	-	28	28	28	28	28	28	28	-	-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
150	80B5	130	165	200	-	-	-	-	-	-	-	19	19	19	19	19
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	38	38	38	38	38	38	38	-	-	-	-
	100/112B5	180	215	250	-	28	28	28	28	28	28	28	28	28	28	28
170	90B5	130	165	200	-	-	-	-	-	-	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	19	19
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
190	132B5	230	265	300	-	38	38	38	38	38	38	38	-	-	-	-
	100/112B5	180	215	250	-	28	28	28	28	28	28	28	28	28	28	28
	90B5	130	165	200	-	-	-	-	-	-	24	24	24	24	24	24
	90B14	95	115	140												
210	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
250	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
280	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
315	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
355	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
400	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
450	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
500	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
560	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
630	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
710	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
800	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
900	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
1000	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
1120	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
1250	100/112B14	110	130	160												
	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
1400	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-
	132B5	230	265	300	-	42	42	42	42	42	42	42	42	42	42	42
	100/112B5	180	215	250	-	-	-	-	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
1560	90B5	130	165	200	-	24	24	24	24	24	24	24	24	24	24	24
	90B14	95	115	140												
	80B5	130	165	200	-	-	-	-	-	-	-	-	-	-	-	-
	80B14	80	100	120	-	-	-	-	-	-	-	-	-	-	-	-